




# YTG40TLV (33 kVA)



## Silent Type Dimension (mm)

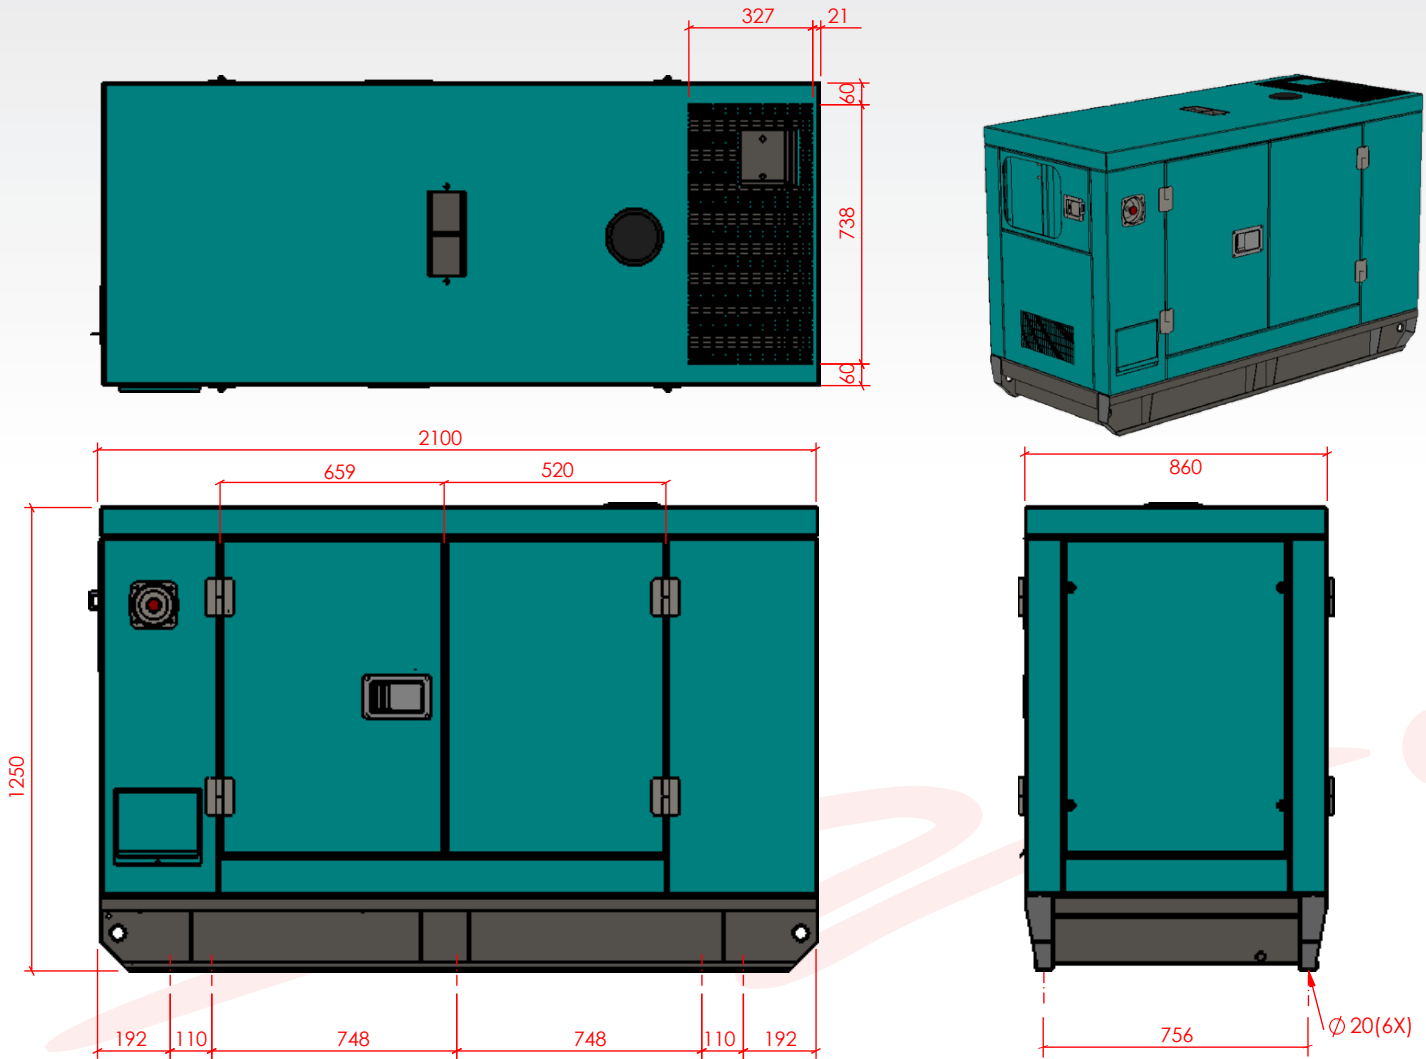

## Genset & Engine Specification



AC Generator Model			YTG40TLV
Output rating (kVA)	50 Hz	380V	Prime 33.0 Standby 35.0
		440V	Prime 38.0 Standby 43.0
	60 Hz	Prime	50.1
		Standby	53.2
Rated current (A)	50 Hz	Prime 49.9 Standby 56.4	
	60 Hz	Prime 49.9 Standby 56.4	
Rated frequency / rated speed	50 Hz	1500 RPM	
	60 Hz	1800 RPM	
No. of poles	4 poles		
Phase and wire	3-phase / 4 wires		
Power factor	0.8 (lagging)		
Voltage regulation	Within +/- 1.5 %		
Excitation	Brushless, Rotating Exciter (with AVR)		
Insulation	Class 'F' / 'H'		
Approx dry weight (silent)	kg	914	
Sound Level dBA from 1 meter / 7 meter	dBA	76 / 66	
Approx dry weight (open)	kg	778	

POWERED BY :



Engine Model		4TNV98
Type of combustion chamber		Direct Injected
Air intake system		Natural Aspiration
Output rating (kW)	1500 RPM ( 50 Hz )	30.7
	1800 RPM ( 60 Hz )	36.4
Rated speed ( 50/60 Hz, rpm )		1500 / 1800
Bore (mm) x stroke (mm)		98 x 110
Piston displacement (cm <sup>3</sup> )		3319
No. of cylinders		4
Fuel		Diesel Fuel ASTM 2D
Fuel consumption (L/hr) at 50/60 Hz	75% load	6.33/7.51
	100% load	8.44/10.01
Lubricating oil capacity (L)		10.5
Coolant capacity (L)		4.2
Fuel tank capacity (L)	sound proof	185
	open skid	110
Starting motor (v-kW)		12 - 2.3
Charging generator (V-A)		12 - 40
Battery capacity (V-Ah)		12 - 65 x 1
Starting system		Electric Starting Motor
Cooling system		Radiator with fan
Lubricating system		Forced lubrication with trochoid pump